


December 2021

The National **Electricity Market**

The National Electricity Market (NEM) operates on one of the world's longest interconnected power systems, stretching from Port Douglas in Queensland to Port Lincoln in South Australia and across the Bass Strait to Tasmania – a distance of around 5.000 kilometres.

The NEM spans Australia's eastern and south-eastern coasts and comprises of five interconnected states that also act as price regions: Queensland, New South Wales (including the Australian Capital Territory), South Australia, Victoria, and Tasmania.

Western Australia and the Northern Territory are not connected to the NEM, primarily due to the distance between networks. The NEM's transmission network carries power from electricity generators to large industrial energy users and local electricity distributors across the five regions. These assets are owned and operated by state governments, or private businesses.

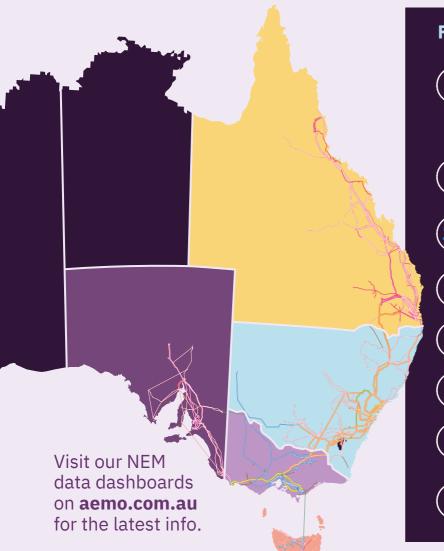

Fast facts



There are over **504** registered participants in the NEM, including market generators, transmission network service providers, distribution network service providers, and market customers.



The NEM commenced operation as a wholesale spot market for electricity in December 1998.



The NEM incorporates around 40,000 km of transmission lines and cables.



The NEM supplies about **204 terawatt** hours of electricity to businesses and households each year.



\$11.5 billion was traded in the NEM in FY 2020-21.



The NEM supplies approximately 10.7 million customers.



The NEM has a total electricity generating capacity of 65,252 MW (as at December 2021).



The NEM has approximately 14 GW



of distributed solar (as at Dec 2021). Collectively the largest generator in the NEM.


The electricity network

To understand the NEM, it's necessary to understand the journey that electricity takes as it travels from generators to customers, and the technology and infrastructure that makes this possible. When an electrical appliance is switched on, power is instantly transmitted from a power station to the appliance. Although this occurs instantaneously, a specific sequence of events takes place to ensure the required electricity is delivered, as illustrated below:

Transport of electricity




1. Generator Produces electricity




transformer Converts low voltage electricity to high voltage for efficient

2. Generator

transport



3. Transmission lines Carry electricity long distances



transformer Converts high voltage electricity to low voltage for distribution



5. Distribution lines Carry low voltage electricity to consumers



and factories Use electricity for lighting and heating and to power appliances



and batteries Can provide electricity to the grid

7. Rooftop solar PV

Energy resources

Australia's generation mix is rapidly transforming, moving closer towards world-first levels of renewable generation. At current rates of development, there could be sufficient renewable resources available to meet 100% of underlying consumer demand in certain periods by 2025. Here are the generation resources that make up our NEM today.

Annual generation by fuel type (2020/21)



64.67% 131.27 TWh Coal

3.85% 7.81 TWh

Gridscale Solar



6.57% 13.33 TWh Gas



7.09% 14.39 TWh **Distributed PV**



10.45% 21.20 TWh Wind



0.05% 0.11 TWh

Battery Energy Storage Systems



7.21% 14.64 TWh Hydro



0.09% 0.18 TWh **Biomass**

The spot market

The NEM is a wholesale commodity exchange for electricity across the five interconnected states. Electricity cannot be stored easily, so the electricity market works as a "pool", or spot market, where power supply and demand is matched instantaneously through a centrally coordinated dispatch process.

Generators offer to supply the market with specified amounts of electricity at specified prices for set time periods and can re-submit the offered amounts at any time.

From all the bids offered, the Australian Energy Market Operator (AEMO) decides which generators will be deployed to produce electricity, with the cheapest generator put into operation first. NEM operation is designed to meet electricity demand (or consumption) in the most cost-efficient way.

Electricity production is matched to electricity consumption, and spare generating capacity is always kept in reserve in case it's needed. The current energy price can then be calculated. Electricity production is also subject to transmission limitations so that the network is not overloaded.

To deliver electricity, a dispatch price is determined every five minutes. Commencing 1 October 2021, Five-Minute Settlement (5MS) shifted the 30-minute wholesale electricity spot market settlement period to five minutes, providing a better price signal for investment in faster response technologies, such as batteries and gas peaking generators.


The National Electricity Rules (the Rules) set a maximum spot price, also known as the Maximum Price Cap. From 1 July 2020, this cap is set at \$15,000 per megawatt hour, and is adjusted annually for inflation.

The Rules also set a minimum spot price, called the market floor price. The market floor price is -\$1,000 per megawatt hour. The Australian Energy Market Commission's Reliability Panel reviews the market price cap and market floor price settings every four years to ensure they align with the NEM reliability standard.

Parallel with the increase in the number of rooftop solar panel systems installed on Australian dwellings, occurrences of negative spot prices in the NEM have become more prevalent. When spot prices are negative, generators pay to generate electricity and consumers get paid to consume electricity.

To pay generators, AEMO must recover costs from customers. Most customers don't participate directly in the NEM, so they purchase their electricity through a retailer. Customers pay the retailers a commercial tariff, and retailers manage customers' energy purchases, including paying AEMO the spot price to avert the risk of system collapse or physical damage to parts of the power system.

NEM participants need to manage the financial risks associated with the significant spot price volatility that occurs during trading periods. They achieve this by using financial contracts that lock in a firm price for electricity that will be produced or consumed at a given time in the future. These arrangements are generally in the form of derivatives, and include swaps or hedges, options and futures contracts.



How the NEM works

The NEM is a wholesale electricity market in which generators sell electricity and retailers buy it to on-sell to consumers. There are over 100 generators and retailers participating in the market, so it's highly competitive and therefore an efficient way of maintaining relatively competitive electricity prices in the wholesale market.

Fluctuating prices

All electricity sales are traded through the NEM. It is a wholesale market and prices fluctuate in response to supply and demand at any point in time.

NEM market price

The price of electricity in the NEM is based on:

- 1. Offers by generator to supply electricity to the market at particular volumes and prices at set times.
- 2. Demand at any given time.

Financial market price

To manage price volatility, retailers and generators often enter into hedging contracts to fix the price for future electricity sale.

FACT SHEET: THE NATIONAL ELECTRICITY MARKET



AEMO's role in the NEM

AEMO is responsible for monitoring electricity consumption and the flow of energy across the power system. If there are system limitations or increases in consumption, AEMO adjusts and, if supplies are inadequate to meet consumption, AEMO may issue notices to the market for additional generation or directly intervene as a last resort.

AEMO also monitors electricity voltage and frequency to make sure the system stays secure. It monitors the impact of planned power outages to make sure the system can accommodate any subsequent loss of generation or transmission capacity.

AEMO controls the NEM via two identical control centres in different states. Each can seamlessly assume responsibility for the entire NEM if needed.

Should consumption in a NEM region exceed supply, and all other means of meeting that consumption have been exhausted, AEMO can contract Reliability and Emergency Reserve Trading (RERT) providers for additional supply, and as a last resort to protect power system security. AEMO can instruct network service providers to temporarily load shed electricity supply to some consumers to avert the risk of system collapse or physical damage to parts of the power system.

This action is only taken when there is an urgent need to protect the power system by reducing consumption and returning supply and demand in the system to balance.

AEMO also operates the retail electricity markets across the NEM. These markets underpin the wholesale market by facilitating retail competition and enabling all customers to purchase energy from the supplier of their choice.

How electricity is measured

Watt (W)	1 WATT	Often seen on packaging for small household products such as light bulbs		A 40 W bulb uses 40 watts of electricity
Kilowatt (KW)	1000 WATTS	The output of rooftop solar panels is often described in kilowatts		A typical residential solar panel system can produce 3.5 KW of electricity.
Megawatt (MW)	1 MILLION WATTS	The output of a power station is described in megawatts	4 4	The Tesla Battery at Hornsdale, South Australia, can produce 100 MW of electricity.
Gigawatt (GW)	1000 MILLION WATTS	Gigawatts are used to describe large amounts of electricity		Maximum demand for NSW in 2019/20 was 13.8 GW.

A kilowatt-hour is the amount of electricity produced or consumed in an hour. A typical Australian home's daily usage is around 17 kWh.

To find out more please visit aemo.com.au or email us at media@aemo.com.au.